


HYDRUMATIC



GEODATALUG 8

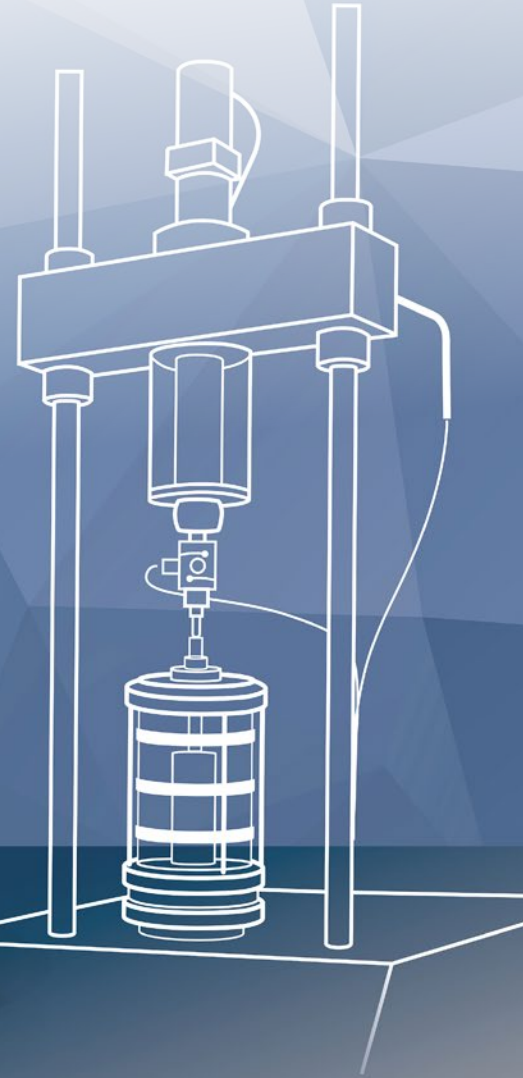

SOIL MECHANICS TESTING MADE EASY

Retrofitting made easy

Stay ahead of technology with our latest generation of flexible integrative components

Modular by design

Wykeham Farrance offers a flexible and comprehensive range of modular components for the retrofitting of geotechnical laboratory equipment that will help you maintain the highest testing standards without any major interruption to your daily workload.

Retrofitting equipment are beneficial to Soil Mechanics laboratories that use old triaxial systems which may cause issues with reliability, productivity and testing set-up. Our unique and exclusive modular approach enables you to future-proof your testing systems by gradually upgrading its components, allowing you to adapt to ever-evolving technologies. Quite simply, our design philosophy ensures that Wykeham Farrance machines NEVER become obsolete and facilitates a seamless transition when adopting new technologies.

A typical existing configuration includes:

TYPICAL EXISTING CONFIGURATION

Basic Data Acquisition

Basic data acquisition with low accuracy and poor solutions for data processing and reporting.

Traditional Pressure Sources

Traditional pressure sources such as self-compensating mercury pots, compressed air, oil and water electricpumps, dead weight devices, etc.

Old Measuring Devices

Manual low resolution volume-change measuring device (lower than 0.1 cc.).

Space Hungry Systems

Driving manual pressure systems, wall panels with manual valves and air regulators must also be supplied meaning more space required in the laboratory and more time for system set-up.

Noisy Systems

Where compressed air is implied, the external compressor produces a disturbing noise and often creates maintenance issues.

RETROFIT CONFIGURATION

Real-time Data Acquisition

Real-time advance data acquisition with effective resolution of 131.000 points and sampling rate up to 500 reading per channels per seconds.

Innovative Pressure Sources

Water pressure source and volume change controller with multi-positioning, ergonomic and removable 6" Color Touch Screen controller that powers-up to two pressure lines under close loop control up to 3500 kPa or 1700 kPa.

Innovative Measuring Device

Automatic high resolution volume-change measurement (0.001 cc) ensuring accuracy better than 0.25% for the measured value.

Small Footprint

No need to fix panel on the wall as the Hydromatic can be easily installed vertically or horizontally with a total size of the complete system smaller than 1.5 m.

Silent System

Air compressor no longer required resulting in a drastic reduction of the noise in the laboratory increasing focus and well-being.



Real-time Data Acquisition





Automatic Data Processing



Load, Displacement, Pressure and Volume Synchronization

Phase 1: Automatic Data Acquisition and Processing

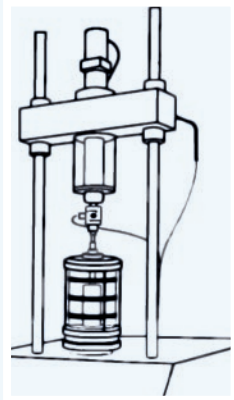

EXISTING DATA
ACQUISITION




GEODATALOG8

DATACOMM2



Phase 2: Automatic Pressure and Volume Controller



AIR/WATER
SYSTEMS



VOLUME CHANGE
APPARATUS



HYDROMATIC

Phase 1 Benefits

Streamline your testing system and save space as the multi-channel multi-logger network connects to a single PC.

Enjoy total peace of mind, our new modular range is compatible with any existing laboratory instruments.

Attain a 0 – 10 VCC or 0 – 20 mA signal effortlessly with adaptors that are compatible with existing transducers also allowing the system to perform a variety of other geotechnical tests.

Have total confidence in your testing results, our flexible and expandable system has up to 64 independent channels for accurate and reliable results.

Access expert material as the system comes complete with extensive data processing and certificates printout that include specific Wykeham Farrance MS Excel® templates, also expandable to real-time monitoring and processing.

Phase 2 Benefits

Simplify and save space as devices for compressed air, control panels and related air / water systems are no longer required.

Eliminate noise and reduce maintenance issues caused by the air compressor continuously running.

Increase your maximum working pressure to 1.7 or 3.5 MPa exceeding the traditional 1 MPa systems.

Save time and increase accuracy as volume change measurements are now calculated directly by HYDROMATIC with high accuracy and repeatability.

Run two pressure lines independently thanks to a smart Touch Screen color interface.

Real-time data acquisition and storage with easy to set-up network connecting with GEODATALOG8.

Discover our full range of products

We also offer completely new innovative Triaxial systems that cater for a multitude of configurations to suit your requirements. Please contact our Technical Sales team on wfsales@controls-group.com for practical advice and information.

Discover our full range of testing systems by visiting www.controls-group.com/wf.



▶ Wykeham Farrance Customer Care

At Wykeham Farrance, we are proud of our products.

As a valued customer of Wykeham Farrance, you will receive continuous, expert support and advice for your instrument. Furthermore, we offer full installation and training in the correct operation of your soil testing equipment.

For support from our expert Customer Care Team, contact your local Wykeham Farrance distributor or email wfsupport@controls-group.com.

Visit our website for more information www.controls-group.com/wf.



▶ Contact Us

Wykeham Farrance

E wfsales@controls-group.com www.controls-group.com/wf



Controls Group USA

2521 Technology Drive, Suite 203, Elgin, IL 60124, USA T +1 847 551 5775 E info@controls-usa.com www.controls-usa.com

www.controls-group.com/wf



Controls Group

T +39 02 92184 1

F +39 02 92103 333

E sales@controls-group.com

www.controls-group.com

Italy (HEAD OFFICE)

www.controlsitalia.it

Mexico

www.controls.com.mx

UK

www.controlstesting.co.uk

Australia

www.controls-group.com

Poland

www.controls.pl

USA

www.controls-usa.com

France

www.controls.fr

Spain

www.controls.es